
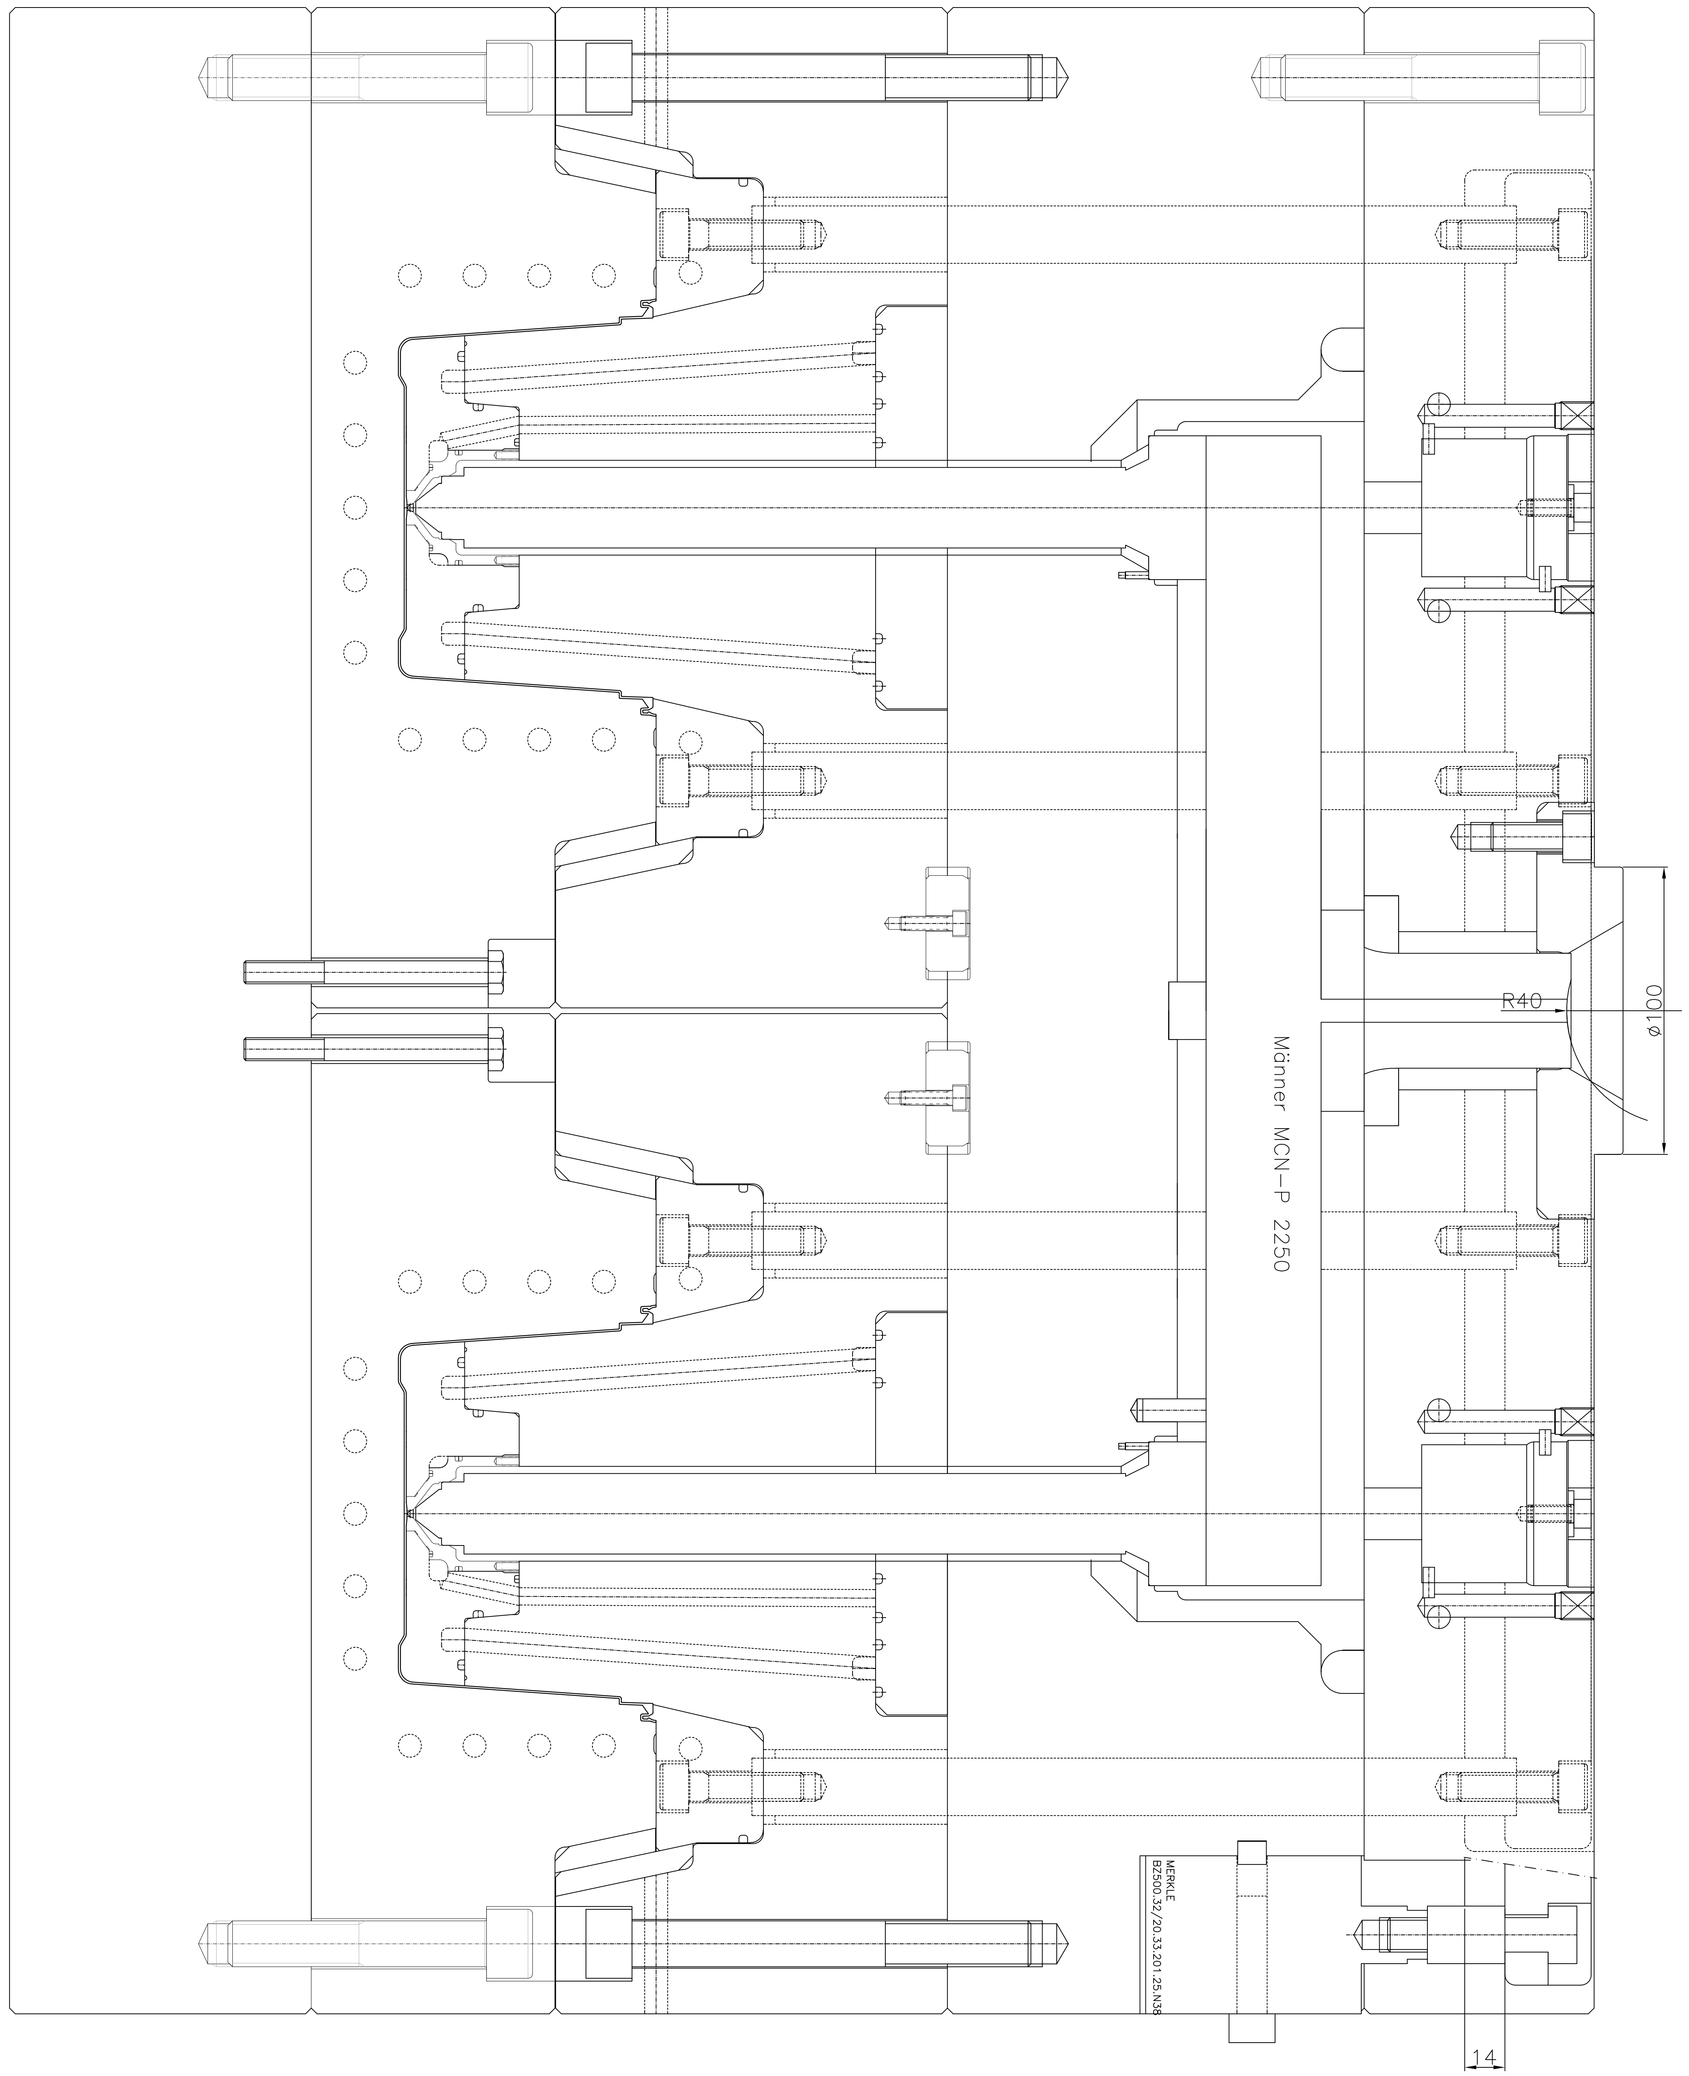


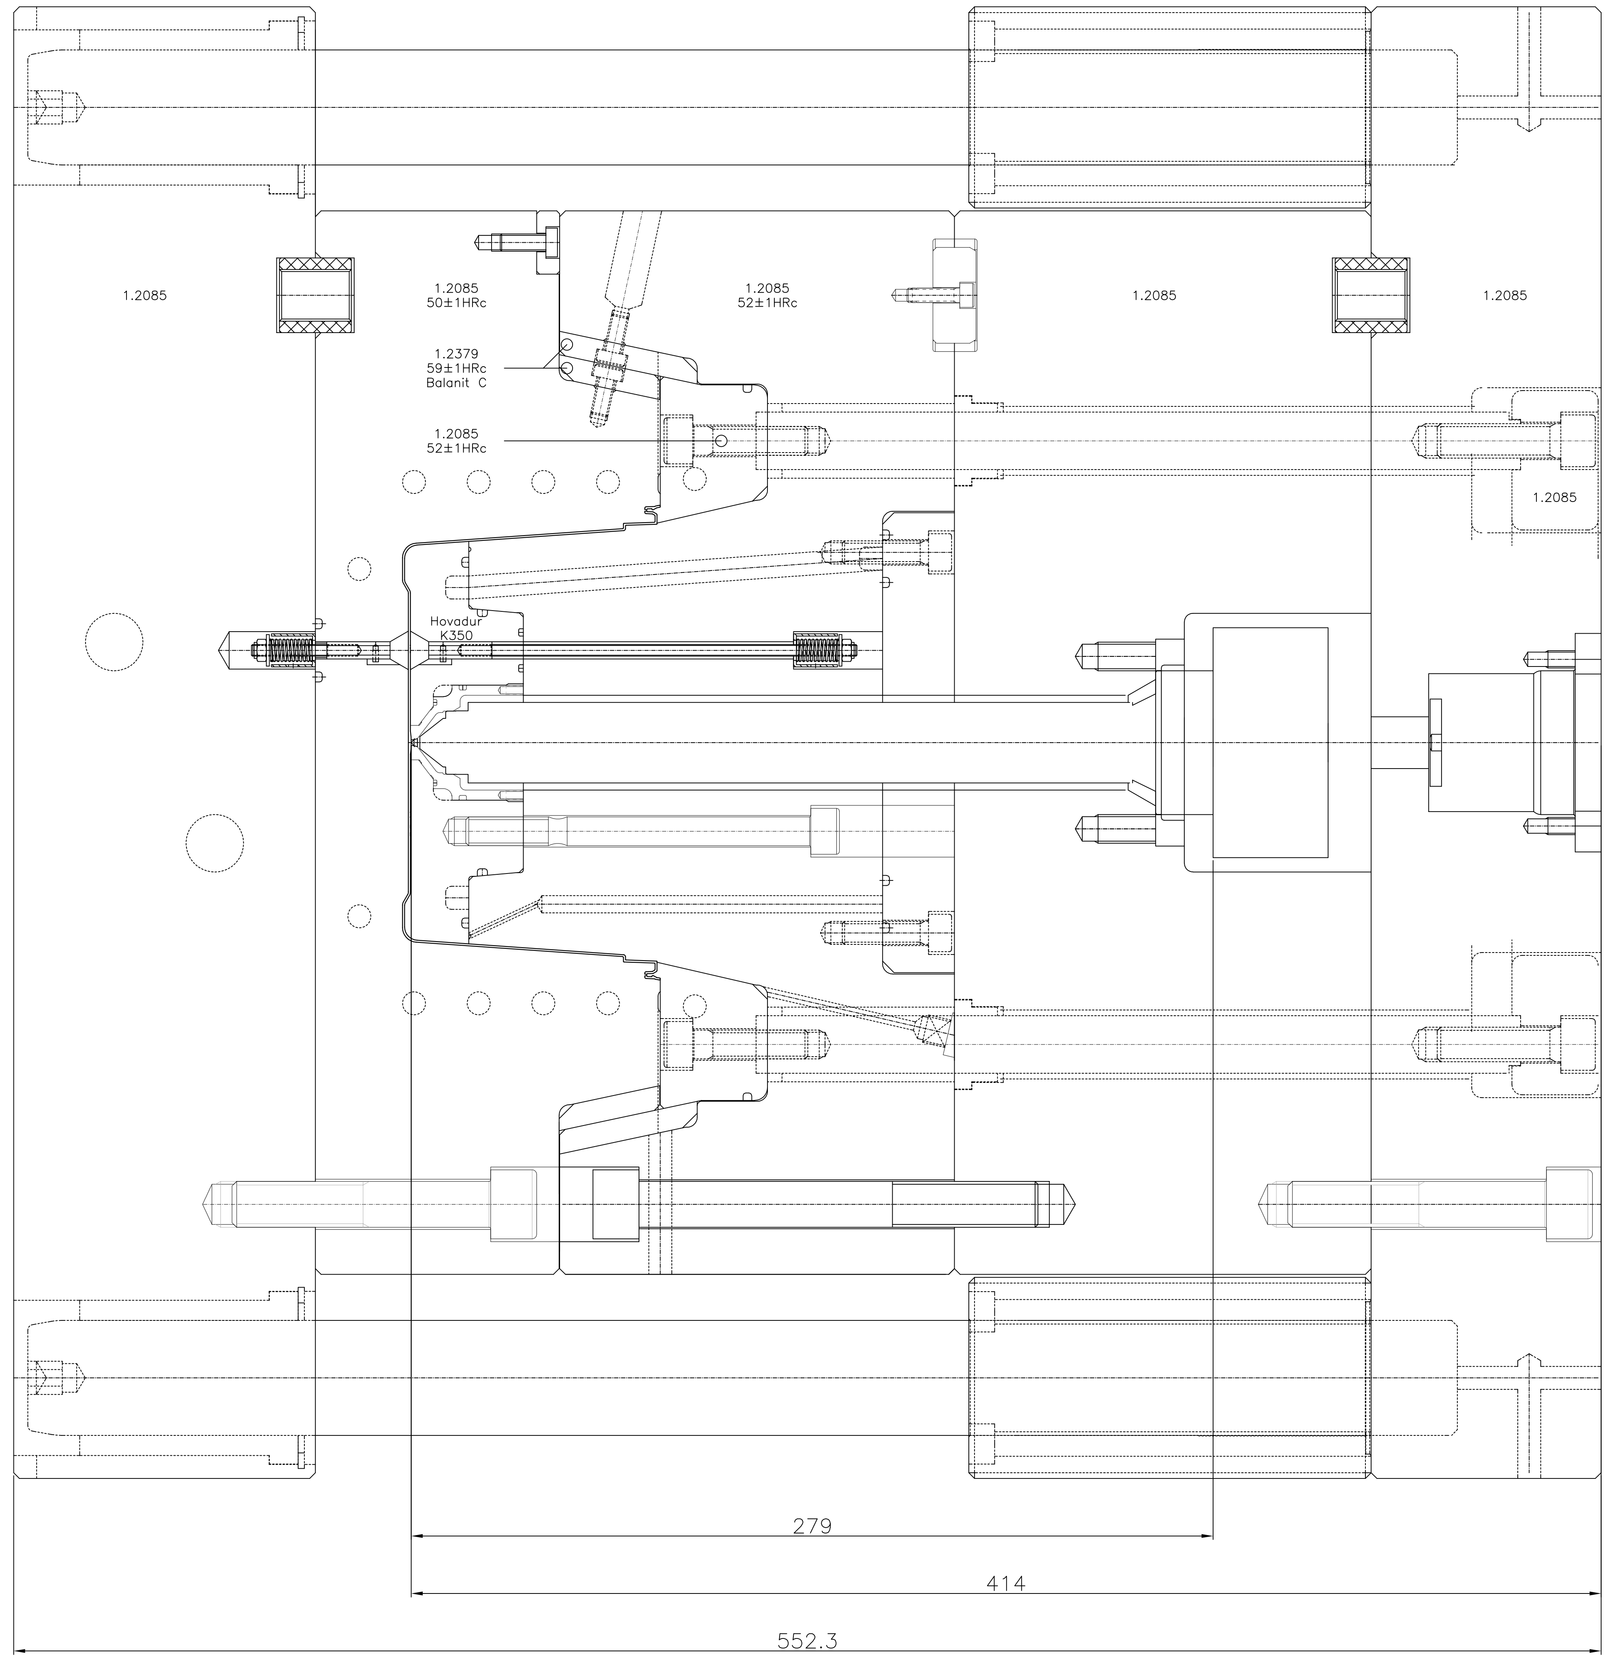


Cooling
- 1 x Central cooling circuit per side
 1 inch Camlock.
- 2x Seperate cooling for cooling bush
 Hasco Z81/13/R¾
- Connectors on XXX side. Not counter sunk

Air
- Festo 1/4"G for 8mm hose.
- Expecting 3 valves +1 for the needles on FS and 1 valve on MS.
- Connectors on XXX side. Not counter sunk


Electrical
- Connectorhouse: HAN 16 pins / 0930 016 0301.
- Insert Heating: HAN 16 pins / 0933 016 2601.
- Insert Thermokoppel: HAN 16 pins / 0933 016 2701
- Expecting 6 hotrunner zones.
- Connectors will be on top of the mould.

Hydraulic
- G¼" only (min pitch of 32mm).
- Thread will be on the bottom of the mould.

Proximity switch
- Connector: Han A 10pins: 1920 010 0251
- Insert male: HAN A 10pins: 0920 010 2612
- Connector will be on top of the mould.

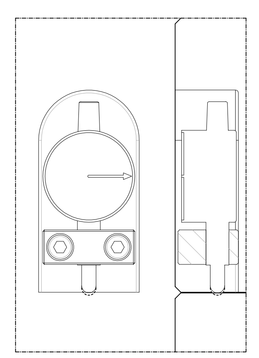

Measure clock
at operator side



Proximity switch
at non-operator side

Concept draft, do not use for production

Engineer: Gijsbert B	Material: –	Quantity: 1	Tolerances unless otherwise specified: 0 ±0.5 0.0 ±0.05 0.00 ±0.005 angles ±0° 30'
Date : 2019-05-10	Remarks: –		
Scale : 1:1			
Project: Mould design v1 1.5ltr 2cav container rct		Client: Thrace Ipoma AD	
BRINK Harskamp Holland Tel.(31)318-452500 Web: www.brinkbv.com	Projection: Units: mm	Order no.: A190030	Posnr.: 000A